

Test Leads

AL-27

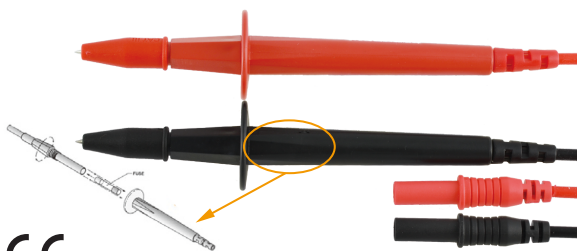
- Wire : PVC UL 1803 / 18AWG
length : 1100±30mm
Out diameter : 3.50mm
Temperature tolerance range : -40°C~105°C
Braid copper wires : 64 / 0.12mm
- Terminal :
Right angle 4mm brass (nickel plated) banana plug.
- Rating :
CAT III 1000V 10A / CAT IV 600V 10A

AL-29, AL-29L

CE

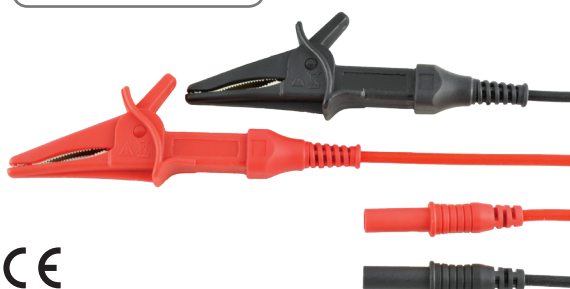


- Wire : PVC UL 1803 / 18AWG
Length : 1100±30mm
Out diameter : 3.50mm
Temperature tolerance range : -40°C~105°C
Braid copper wires : 64 / 0.12mm
- Terminal :
AL-29 : Straight input plug
AL-29L : Right angle input plug
- Rating :
EN 61010-031:2002 + A1:2008
CAT IV 600V / CAT III 1000V 10A

AL-30,AL-30F

CE

- The spring-shrouded 4mm brass caged banana probe tip.
- Double insulated silicone wire 1m.
- Safety straight input plug.
- Rating : EN 61010-31:2002 + A1:2008
CAT III 1000V 10A
AL-30R Red, AL-30B Black, AL-30G Green
- **AL-30F** It is the fused version for **AL-30**.
Fuse size : 6x32mm
Rating : EN 61010-031:2002 + A1:2008
CAT III 250V 10A / 500V 10A / 690V 2A
AL-30FR Red, AL-30FB Black

AL-30A

CE

- Wide grip alligator clips with integral finger guard, large 35mm high tension spring mouth.
- Double insulated silicone wire 1m.
- Safety straight input plug.
- Rating : EN 61010-031:2002 + A1:2008 CAT III 1000V 10A
AL-30AR Red
AL-30AB Black
AL-30AG Green
AL-30AL: 90° angle 4mm banana plug.